
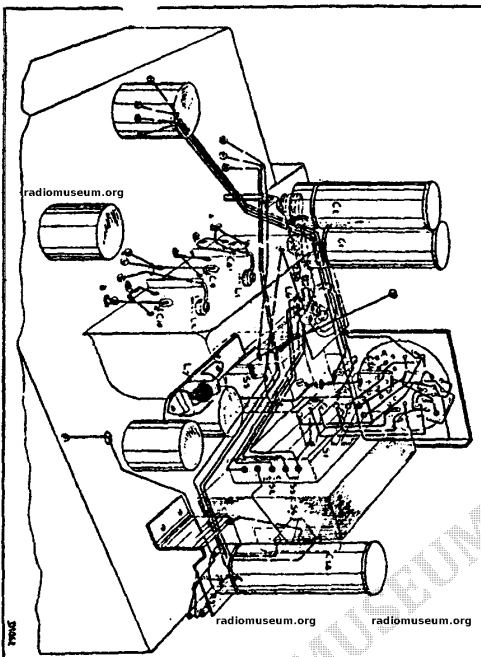


4283 = 4.3 — 5.3 Ω
110 V, 125 V, 145 V
200 V, 220 V, 245 V

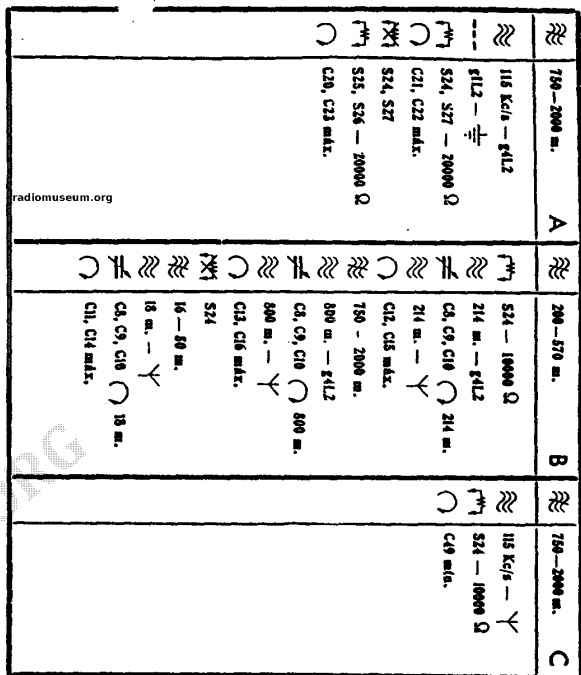

	L1	L2	L3	L4	L5	
	AR3	AK2	AR3	ABCI	AL2	
Va	279	273	279	94	225	Volts.
Vc	104	0°5.68 01.92	104		250	Volts.
-Vc	3.5	1.7	3.7	2.7	23	Volts.
1a	8	1.7	6.6	0.93	37	m.A.
1c	2.5	0°3.26 01.75	2.6		3.2	m.A.
V1	4	4	4	4	4	Volts.

C1	32 U.R.	28 188 011	R1	16000/2	28 771 020
C2	32 U.R.	28 188 011	R2	50000/2	28 771 099
C3	25 U.R.	28 188 020	R3	50000/3	28 771 070
C4	25 U.R.	28 188 020	R4	250	28 770 190
C5	50000 PF	28 198 170	R5	250	28 770 310
C6	50000 PF	28 198 170	R6	400	28 770 910
C7	0.5-445 P/I	28 210 591	R7	22000	28 770 510
C8	0.5-445 P/I	28 210 591	R8	1250/2	28 770 510
C9	0.5-445 P/I	28 210 591	R9	10000	28 770 550
C10	0.5-445 P/I	28 210 591	R10	64	28 770 550
C11	0.27 PF	28 210 591	R11	50000	28 770 520
C12	0.27 PF	28 210 591	R12	0.5 M	28 770 520
C13	0.27 PF	28 210 591	R13	50000	28 770 420
C14	0.27 PF	28 210 591	R14	0.5 M	28 569 290
C15	0.27 PF	28 210 591	R15	3200	28 770 290
C16	0.27 PF	28 210 591	R16	1.6 M	28 770 290
C17	0.27 PF	28 210 591	R17	2200	28 770 570
C18	0.27 PF	28 210 591	R18	2570 290	28 770 570
C19	0.27 PF	28 210 591	R19	1 M	28 770 520
C20	40-145 PF	25 210 540	R20	0.4 M	28 770 520
C21	40-145 PF	25 210 540	R21	1.6 M	28 770 570
C22	40-145 PF	25 210 540	R22	0.2 M	28 770 540
C23	40-145 PF	25 210 540	R23	0.4 M	28 770 520
C24	500 PF	28 190 200	R24	1000	28 770 520
C25	80 PF	28 190 120	R25	50000	28 770 250
C26	50000 PF	28 190 320	R26	50000	28 569 290
C27	0.1 U.R.	28 190 320	R27	60000	28 770 400
C28	32 U.R.	28 188 021	R28	0.2 M	28 770 110
C29	32 U.R.	28 188 021	R29	40	28 770 110
C30	0.1 U.R.	28 190 320	R30	10000	28 770 250
C31	100 PF	28 190 320	R31	10000	28 770 250
C32	20 PF	28 190 060		100	28 770 150
C33	1750 PF	28 190 060			
C34	555 PF	28 190 060			
C35	0.1 U.R.	28 190 060			
C36	0.1 U.R.	28 190 060			
C37	220 PF	28 190 100			
C38	220 PF	28 190 100			
C39	10000 PF	28 190 100			
C40	100 PF	28 190 120			
C41	0.1 U.R.	28 190 200			
C42	50000 PF	28 190 170			
C43	10000 PF	28 190 100			
C44	32000 PF	28 190 220			
C45	2000 PF	28 190 250			
C46	50000 PF	28 190 150			
C47	160 PF	28 190 220			
C48	10000 PF	28 190 220			
C49	40-145 PF	28 210 540			