

Thank you for your interest in our schematics. The schematic is available on the next page.


If you want to download additional parts of a schematic, or additional schematics, these must be requested individually.

To provide you with this information, more than 6000 members work regularly on the content of Radiomuseum.org.

As a member, you can access schematics, large images without watermarks and collector's prices. You will also surf at Radiomuseum.org without advertising. To do so, you may support Radiomuseum.org with a one-time membership fee of 20 € or 30 CHF or 25 US \$. We would be delighted if you joined as a member:


https://www.radiomuseum.org/dsp_anmelden_start.cfm

These books might be of interest of you:




Hello, Everybody! The Dawn of American Radio

Long before the Internet, another young technology was transforming the way we connect with the world. At the dawn of the twentieth century, radio grew from an obscure hobby into a mass medium with the power to reach millions of people.



The Rise of Radio, from Marconi through the Golden Age

As the dominant form of electronic mass communication in the United States from the 1930s into the 1950s, radio helped to forge a modern continental nation. It fused myriad subcultures heavily rural, ethnic, and immigrant into a national identity, unifying the nation in the face of the Depression and war.




The Paraset Radio: The Story of a WWII Spy-Radio and How to Build a Working Replica

This book describes the gripping story behind the Paraset – a unique spy-radio, dropped behind enemy lines in the dark days of WWII. This radio being both light weight and state of the art for the time was concealed in a suitcase, making ideal for use by the spies of SOE.

Click [here](#) for further information.

ZENITH - Seite 10

ZENITH
7S 28.7S 53, (5704)

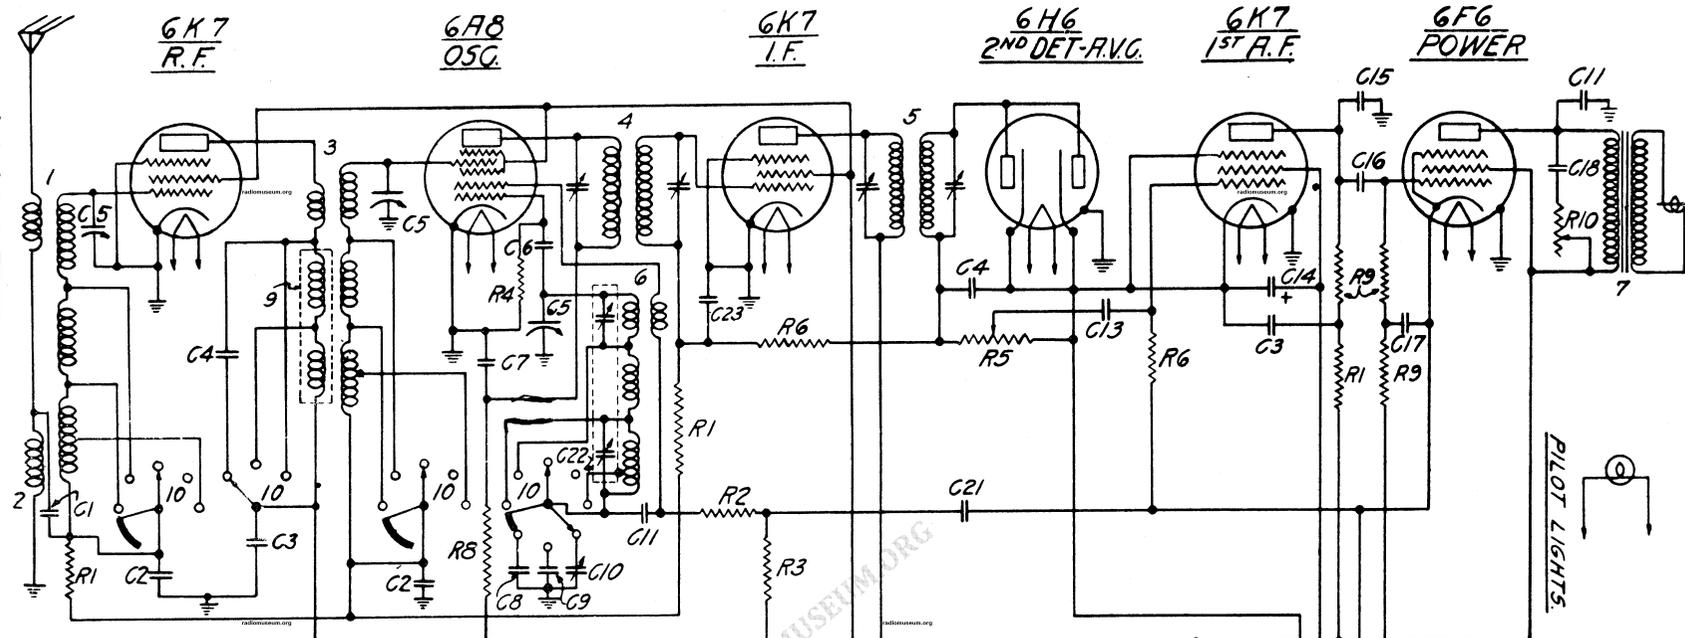


DIAG N°	PART N°	DESCRIPTION
C1	22-243	.01 400V
C2	22-410	.003 600V
C3	22-170	.1 400V
C4	22-289	.1 VARIABLE 600V
C5	22-409	.00005 600V
C6	22-127	.000025 600V
C7	22-212	.05 400V
C8	22-411	.0023 600V
C9	22-345	.0011 600V
C10	22-205	200-550 PRDGR 600V
C11	22-82	.001 600V
C12	22-224	.1 300V
C13	22-188	.02 400V
C14	22-420	10 MFD 25V
C15	22-162	.0001 600V
C16	22-435	.02 600V
C17	22-190	.1 200V
C18	22-417	.1 600V
C19	22-416	8 MFD 450V
C20	22-416	8 MFD 450V
C21	22-416	2 MFD 450V
C22	22-408	2-35 MMFD
C23	22-250	.05 200V

I.F. FREQUENCY
456 KC.

DIAG N°	PART N°	DESCRIPTION
R1	63-278	99M OHMS 1/2W
R2	63-373	11M 1/2W
R3	63-353	19M 1/2W
R4	63-280	49M 1/2W
R5	63-457	400M VOL CONTROL 1/2W
R6	63-293	990M OHMS 1/2W
R7	63-453	CANDOHM 1/2W
R8	63-466	990 OHMS 1/2W
R9	63-258	490M 1/2W
R10	63-458	50M TONE CONTROL 1/2W

- 1 5-3697 ANT. COIL ASSEM.
- 2 20-82 ANT. CHOK (11M.)
- 3 5-3698 DET. COIL ASSEM.
- 4 95-291 1ST I.F. TRANS.
- 5 95-292 2ND I.F. TRANS.
- 6 5-3699 OSC. COIL ASSEM.
- 7 49-117 8" SPKR - MOD. 75-28
- 8 95-289 POWER TRANS. 60V
- 9 20-119 R.F. PLATE CHOK ASSEM.
- 10 85-78 BRAND SELECT SWITCH
- 11 95-290 POWER TRANS. 25V
- 12 49-122 12" SPKR. MOD. 75-53
- 13 85-39 PHONO. SWITCH
- 14 44-7 " JACK.

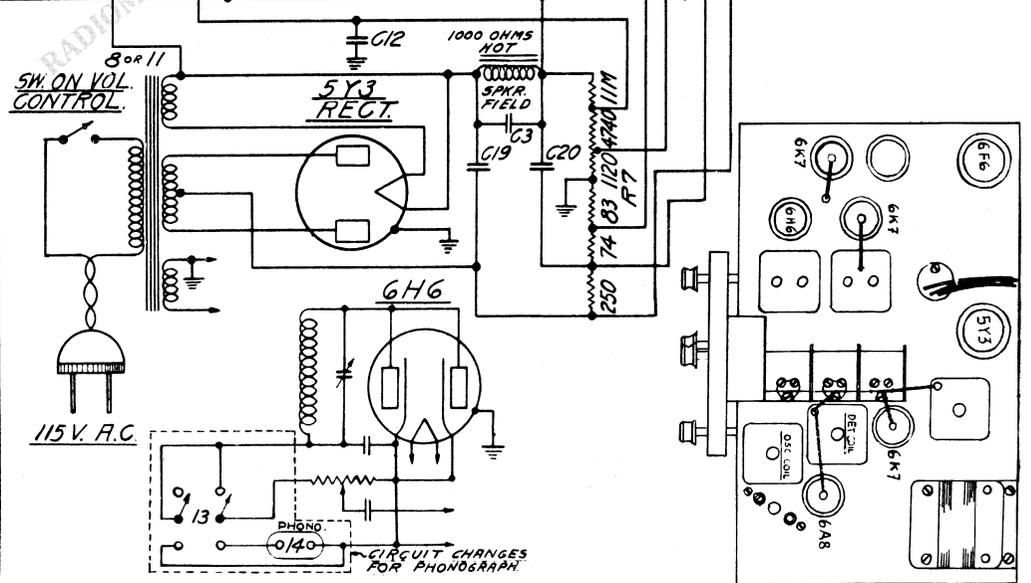

Schaltungs-Sammlung H. Thali, Hitzkirch