


1	6	23, 24, 19 11 7 9 27 10 18 15 22 14, 16, 26, 13, 12, 8									
21	22	24	14, 37	25, 36, 15, 29, 23, 30	26	43, 35, 27	28	40, 33	31	32	38
10 11											14 15, 16

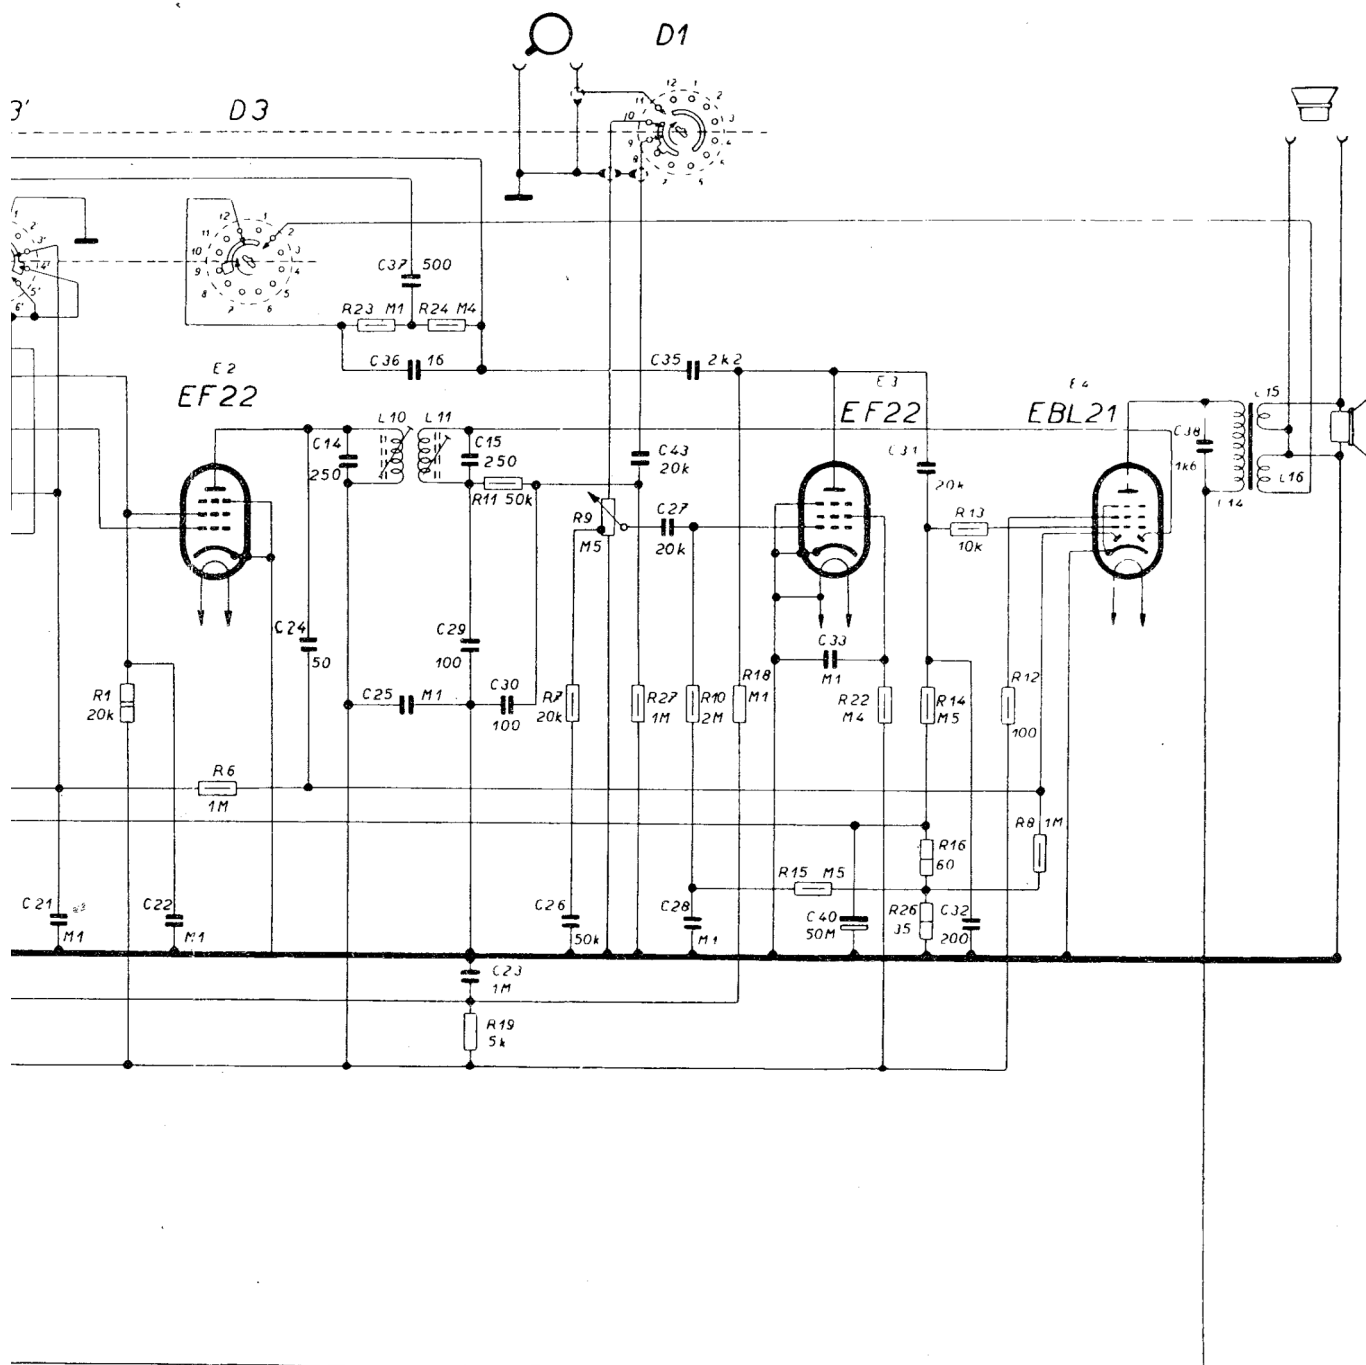


3

ová deska D 3	
10' - 11'	2-12
1' - 10'	2-12

100	— —	100 pF	— —	0.25 W
10k	— —	10000 pF	— —	0.5 W
1M	— —	1 μF	— —	1 W
100	— —	100 Ω	— —	2 W
10k	— —	10000 Ω	— —	3 W
1M	— —	1 MΩ	— —	4 W

Schema zapojení přijímače TESLA „605A”

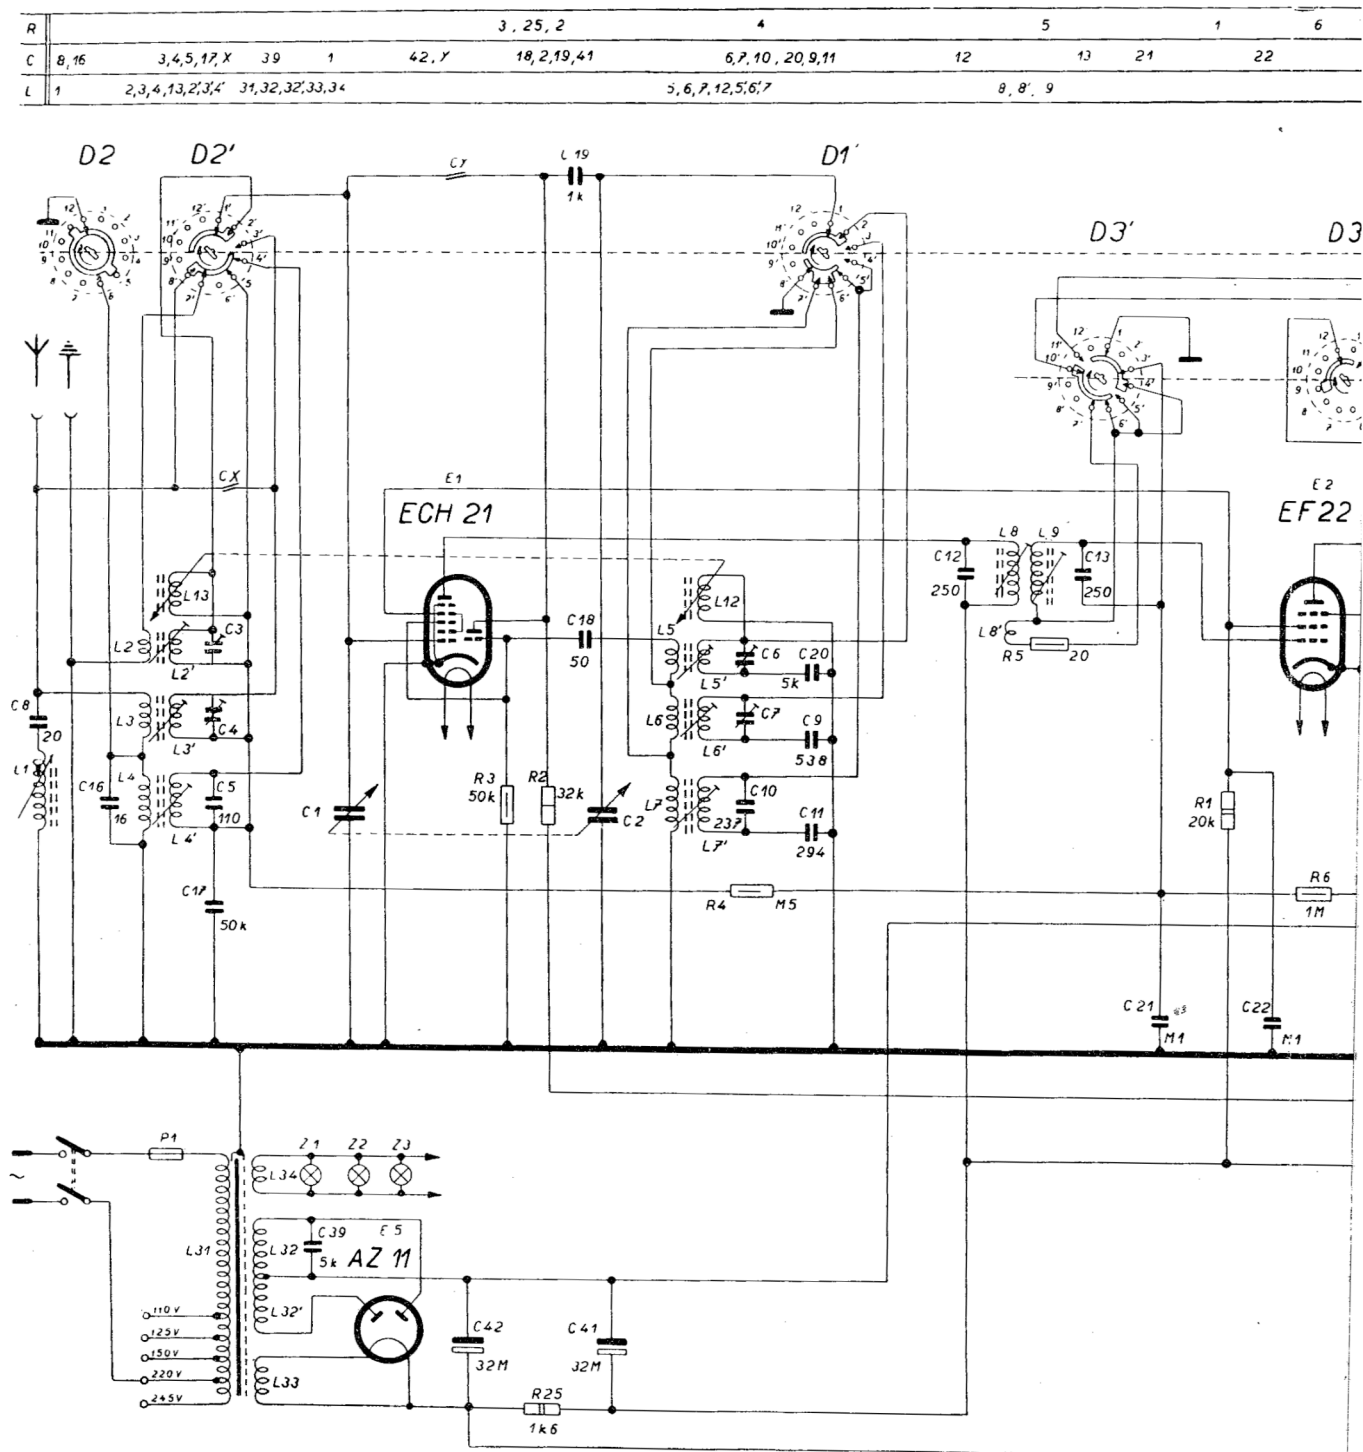

Přepínač zakreslen v poloze krátkých vln (16'5-51'5 m)

Vlnové rozsahy	Doteková deska D 2	Doteková deska D 1
I 16.5 — 51.5 m	— 1' - 2', 7' - 8'	1' - 2', 6' - 7' - 8' 9-10
II 187 — 572 m	6 - 12 1' - 3'	1' - 3', 7' - 8' 9-10
III 1000 — 2000 m	— 1' - 4'	1' - 4' 9-10
§ gramofon	— 1' - 5'	1' - 5' 10-11

Přepínač zakreslen v poloze „řeč“ §

Jakost reprodukce	Doteková deska D 3
§ úzké pásmo, řeč	3' - 4' —
§ úzké pásmo, hloubky	3' - 5', 10' - 11' 2-12
§ úzké pásmo	3' - 6' 2-12
§ široké pásmo	3' - 7', 1' - 10' 2-12

100
10
1M
10
10
1M